

## VS-P12 series handheld HD industrial endoscope specification




Professional industrial endoscope solution supplier

To be as your wish

## More efficient detection

VS-P series is equipped with a number of detection functions, with advanced technology, and comprehensive functions, which assists the inspectors to complete the inspection work efficiently.

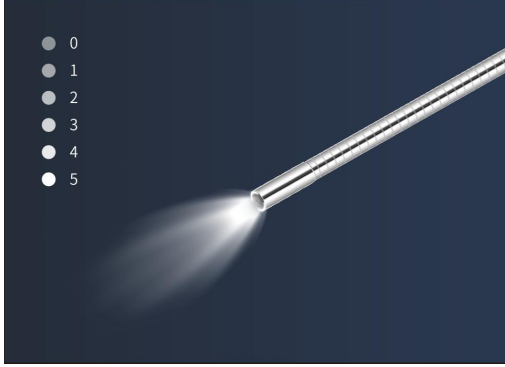

Optical fiber illumination for clearer images

0.95-8mm  
Various probe diameters are available



More probes for optional



Quick to change probes



6 inch screen, more convenient to watch



WIFI wireless transmission (for optional)




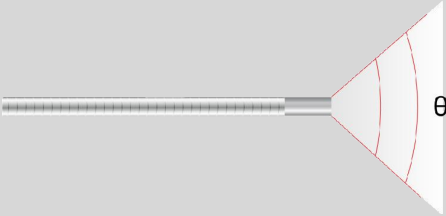



Dual circuit design, single battery can also work

<b>Host</b>	Size	375×175×78mm
	Display	6 inch industrial grade LCD screen
	resolving power	1920X1080
	Output port	TF card, HDMI port, Type-C, Headphone jack
	Memory card	Standard 32G TF card, Support up to 128G
	Power	≧8 hours of battery life, dual circuit design, single cell battery can also be turned on and work (supports battery replacement without shutting down)
	IP grade	IP54
	Working temperature	-10°C~50°C
	Storage temperature	-20°C~60°C
	Relative humidity	Max 90%, no condensation
<b>System</b>	Operation system	Multifunctional operating system
	Operation method	Button navigation, dual camera and video buttons
	Support function	With freeze, zoom, photo, flip, video playback, analog ruler,Color, black and white, negative film function
	File format	Image JPEG (JPG) format, Video AVI format
	Language	Chinese English etc 7 languages
<b>Packing Case</b>	Weight	3.9kg
	L*M*H	47.9*38.7*15.5cm













## Camera and Probe

There are several length and diameter for VS-P12series for you to chose according to your requirement.

Model		VS-P12	
		VS-P1210	VS-P1220
Lens	Direction	Direct view	
	View angle( $\theta$ )	120°	
	DOF	3mm~30mm	
	Pixel	160000	
	Illuminating system	Rear high-power LED fiber optic transmission	
Probe	Length(L)	/	
	Diameter(D)	1.2mm	
	Articulating	No Articulating	
	Bending Angle( $\alpha$ )	/	
	Working temperature	-20°C~70°C	
Insert tube	Length	1m	2m
	Material	Flexible (tungsten braided tube)	

	VS-P (Direct view)
Lens direction	
View angle( $\theta$ )	
DOF	
Probe Length(L)	
Probe diameter(D)	

## Packing list

No	Name	PCS	Unit	Photos
1	Host	1	pcs	
2	18650 battery	4	pcs	
3	Packing case	1	pcs	
4	Memory card	1	pcs	
5	Card reader	1	pcs	
6	Tripod	1	pcs	
7	Data line	1	pcs	
8	HDMI cable	1	pcs	
9	Charger	1	pcs	
10	Warranty card	1	pcs	 <p style="text-align: center; font-size: small;">Warranty Card</p>
11	User manual	1	pcs	 <p style="text-align: center; font-size: small;">Warning: Please read the instruction manual before use.</p>
12	Guarantee Card	1	pcs	 <p style="text-align: center; font-size: x-small;">QUALIFIED CERTIFICATE</p> <p style="text-align: center; font-size: x-small;">MODEL: _____</p> <p style="text-align: center; font-size: x-small;">DATE: _____</p> <p style="text-align: center; font-size: x-small;">INSPECTOR: _____</p>