

VS-K095 series portable industrial endoscope




Professional industrial endoscope solution supplier

To be as your wish

More efficient detection

VS-K series is equipped with a number of detection functions, with advanced technology, and comprehensive functions, which assists the inspectors to complete the inspection work efficiently.

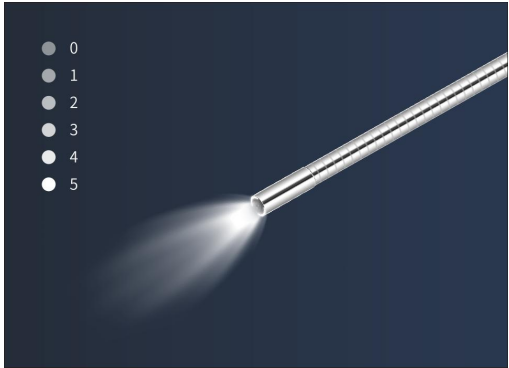

Optical fiber illumination for clearer images

0.95-8mm
Various probe diameters are available



More probes for optional



Quick to change probes



5 inch screen, more convenient to watch



WIFI wireless transmission (for optional)




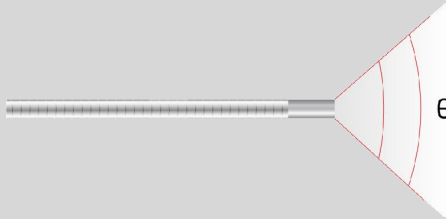



Temperature warning (for optional)

Host	Dimension	350*155*59mm
	Display	5 inch industrial touch LCD screen
	Output port	HDMI video output, Micro USB、TF card slot
	Storage	32G
	Power	Special rechargeable lithium battery pack, online charging, battery life \cong 4 hours
	IP grade	IP54
	Working temperature	-10°C~50°C
	Storage temperature	-20°C~60°C
System	Relative humidity	Max 95%, No condensation
	Operation System	Multifunctional operating system
	Operation method	Button navigation, dual camera and video buttons
	Support Function	With freeze, zoom, photo, flip, video playback, analog ruler functions
	File Format	Image:JPEG (JPG), Video:AVI
Packing Case	Support Language	Chinese (Simplified and Traditional), French, English, German, Spanish, Italian, Japanese
	Weight	3.9kg
	L*W*H	47.9*38.7*15.5cm










Camera and Probe

There are several length and diameter for VS-K095 series for you to chose according to your requirement.

Model		VS-K095	
		VS-K09510	VS-K09520
Lens	Direction	Direct view	
	View angle	120°	
	DOF	3mm~30mm	
	Pixel	160000	
	Illuminating system	Rear high-power LED fiber optic transmission	
Probe	Length(L)	/	
	Diameter(D)	0.95mm	
	Articulating	No Articulating	
	Working temperature	-20°C~70°C	
Inserting tube	Length	1m	2m
	Material	Bourdon tube	

VS-K (Direct view)	
Lens direction	
View angle(θ)	
DOF	
Probe Length(L)	
Probe diameter(D)	

Packing list

No	Name	PCS	Unit	Photos
1	Host	1	pcs	
2	Battery	1	pcs	
3	Packing Cast	1	pcs	
4	Memory Card	1	pcs	
5	Card reader	1	pcs	
6	Tripod	1	pcs	
7	USB cable	1	pcs	
8	Charger	1	pcs	
9	Warranty card	1	pcs	 <p style="text-align: center;">WARRANTY CARD</p> <p style="text-align: center; font-size: small;">SHENZHEN VSMET CO.,LTD</p>
10	User manual	1	pcs	<p style="text-align: center;">Industrial Endoscope</p> 
11	Guarantee Card	1	pcs	 <p style="text-align: center; font-size: small;">QUALIFIED CERTIFICATE</p> <p style="text-align: center; font-size: x-small;">MODEL: _____</p> <p style="text-align: center; font-size: x-small;">DATE: _____</p> <p style="text-align: center; font-size: x-small;">INSPECTOR: _____</p>