

VS-K24 series portable industrial endoscope



Multiple colors available


- Black
- Grey
- Orange

Professional industrial endoscope solution supplier

To be as your wish

More efficient detection

VS-K series is equipped with a number of detection functions, with advanced technology , and comprehensive functions , which assists the inspectors to complete the inspection work efficiently.

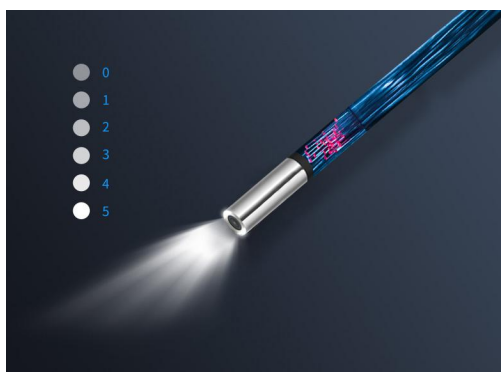

Optical fiber illumination for clearer images

0.95-8mm
Various probe diameters are available



More probes for optional



Quick to change probes



5 inch screen, more convenient to watch



WIFI wireless transmission (for optional)










Temperature warning (for optional)

Host	Dimension	350*155*59mm
	Display	5 inch industrial touch LCD screen
	Output port	HDMI video output, Micro USB、TF card slot
	Storage	32G
	Power	Special rechargeable lithium battery pack, online charging, battery life \cong 4 hours
	IP grade	IP54
	Working temperature	-10°C~50°C
	Storage temperature	-20°C~60°C
	Relative humidity	Max 95%, No condensation
System	Operation System	Multifunctional operating system
	Operation method	Button navigation, dual camera and video buttons
	Support Function	With freeze, zoom, photo, flip, video playback, analog ruler functions
	File Format	Image:JPEG (JPG), Video:AVI
	Support Language	Chinese (Simplified and Traditional), French, English, German, Spanish, Italian, Japanese
Packing Case	Weight	3.9kg
	L*W*H	47.9*38.7*15.5cm



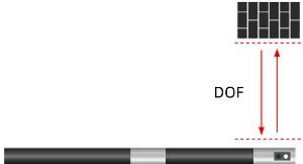

Camera and Probe

There are several length and diameter for VS-K24 series for you to chose according to your requirement.

Model		VS-K24		
		VS-K2410	VS-K2420	VS-K2430
Lens	Direction	Direct view		
	View angle	120°		
	DOF	3mm~70mm,5~100mm		
	Pixel	160000		
	Illuminating system	Rear high-power LED fiber optic transmission		
Probe	Length(L)	4.5±0.5mm		
	Diameter(D)	2.4mm		
	Articulating	180°two way Articulating		
	Bending Angle(α)	150°±10°	100°±10°	100±10°
	Brightness of Illumination	1m	1m<L≤2m	
		≥10000Lux	≥8000Lux	
	Working temperature	-20°C~70°C		
Inserting tube	Length	1m	2m	3m
	Material	Flexible (tungsten braided tube)		

VS-K (Direct view)	
Lens direction	
View angle(θ)	
DOF	
Probe Length(L)	
Probe diameter(D)	
Articulation	
Bending angle(α)	

Packing list

No	Name	PCS	Unit	Photos
1	Host	1	pcs	
2	Battery	1	pcs	
3	Packing Cast	1	pcs	
4	Memory Card	1	pcs	
5	Card reader	1	pcs	
6	Tripod	1	pcs	
7	USB cable	1	pcs	
8	Charger	1	pcs	
9	Warranty card	1	pcs	 <p style="text-align: center; font-size: small;">WARRANTY CARD</p> <p style="text-align: center; font-size: x-small;">SHENZHEN VANDT CO., LTD.</p>
10	User manual	1	pcs	 <p style="text-align: center; font-size: small;">Industrial Endoscope User Manual</p>
11	Guarantee Card	1	pcs	 <p style="text-align: center; font-size: x-small;">QUALIFIED CERTIFICATE</p> <p style="text-align: center; font-size: x-small;">MODEL: _____ DATE: _____ INSPECTOR: _____</p>