

VS-K60 series portable industrial endoscope



Professional industrial endoscope solution supplier

To be as your wish

More efficient detection

VS-K series is equipped with a number of detection functions, with advanced technology, and comprehensive functions, which assists the inspectors to complete the inspection work efficiently.



Optical fiber illumination for clearer images

0.95-8mm
Various probe diameters are available



More probes for optional



Quick to change probes



5 inch screen, more convenient to watch



WIFI wireless transmission (for optional)






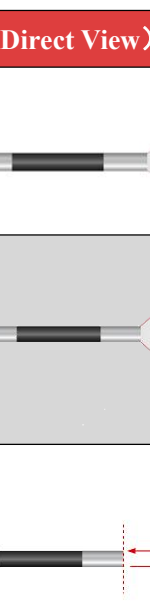


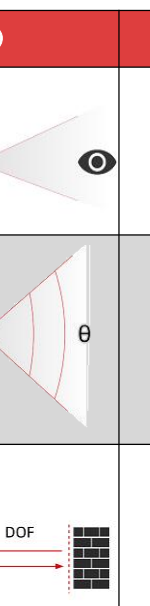
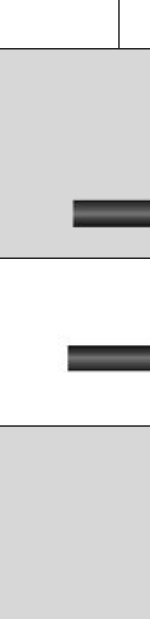

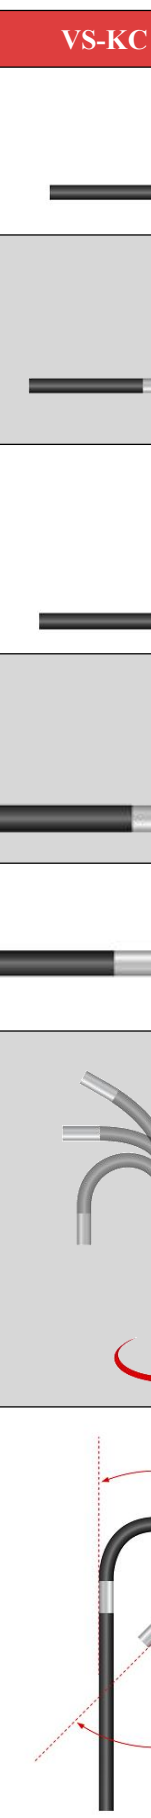

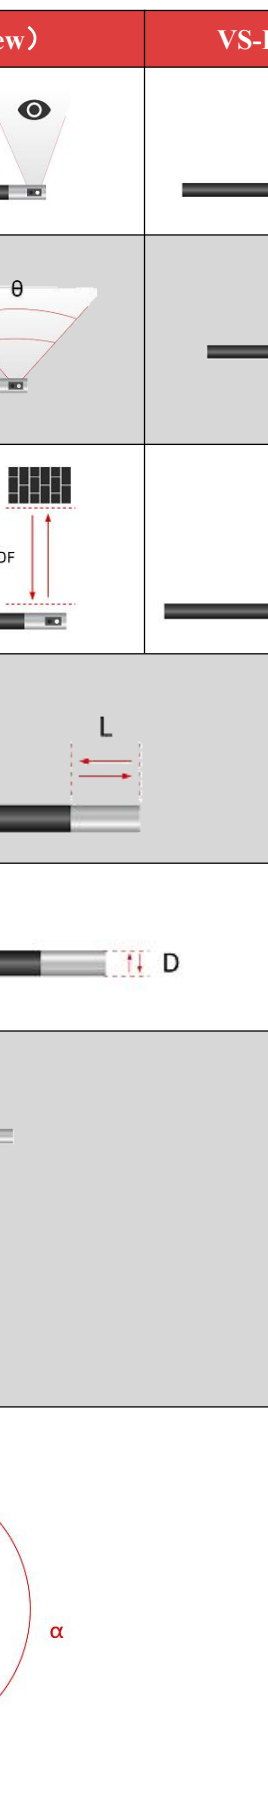

Temperature warning (for optional)

Host	Dimension	350*155*59mm
	Display	5 inch industrial touch LCD screen
	Output port	HDMI video output, Micro USB、TF card slot
	Storage	32G
	Power	Special rechargeable lithium battery pack, online charging, battery life \geq 4 hours
	IP grade	IP54
	Working temperature	-10°C~50°C
	Storage temperature	-20°C~60°C
System	Relative humidity	Max 95%, No condensation
	Operation System	Multifunctional operating system
	Operation method	Button navigation, dual camera and video buttons
	Support Function	With freeze, zoom, photo, flip, video playback, analog ruler functions
	File Format	Image:JPEG (JPG), Video:AVI
Packing Case	Support Language	Chinese (Simplified and Traditional), French, English, German, Spanish, Italian, Japanese
	Weight	3.9kg
	L*W*H	47.9*38.7*15.5cm





Camera and Probe

There are several length and diameter for VS-K60 series for you to chose according to your requirement.

Model		VS-K60						
		VS-K6010	VS-K6020	VS-K6030	VS-K6040	VS-K6050	VS-K6060	
Lens	Direction	Direct view/Side view/Double view						
	View angle(θ)	120°						
	DOF	12mm~200mm						
	Pixel	1MP						
	Illuminating system	Rear high-power LED fiber optic transmission						
Probe	Length(L)	13±0.5mm						
	Diameter(D)	6mm						
	Articulating	360° full direction articulation						
	Bending Angle(α)	170°±10°		160°±10°	150°±10°	130°±10°	120°±10°	
	Brightness of Illumination		1m	1m<L≤2m	2m<L≤4m	4m<L≤6m		> 6m
		Direct view	≥100000Lux	≥90000Lux	≥80000Lux	≥70000Lux		≥60000Lux
	Double view	≥60000/10000 Lux	≥50000/10000Lux	≥40000/10000Lux	≥30000/8000Lux		/	
	IP grade	IP67						
	Working temperature	-20°C~70°C						
	Insert tube	Length	1m	2m	3m	4m	5m	6m
Material		Flexible (tungsten braided tube)						

	VS-K (Direct View)	VS-KC (Side view)	VS-KS (Double view)
Lens direction			
View angle(θ)			
DOF			
Probe Length(L)			
Probe diameter(D)			
360°articulation			
Bending angle(α)			

Packing list

No	Name	PCS	Unit	Photos
1	Host	1	pcs	
2	Battery	1	pcs	
3	Packing Cast	1	pcs	
4	Memory Card	1	pcs	
5	Card reader	1	pcs	
6	Tripod	1	pcs	
7	USB cable	1	pcs	
8	Charger	1	pcs	
9	Warranty card	1	pcs	
10	User manual	1	pcs	
11	Guarantee Card	1	pcs	