



INDUSTRIAL ENDOSCOPE MANUFACTURER



Two way articulating endoscope
VS-RCseries

- Two way articulating
- LED illumination
- HD Mega pixel camera
- Quickly generate detection report
- 6mm probe
- Type-C port plug and play
- High temperature quick protection
- IP67



Two way articulating

Configure the precise rotation button for more precise control, capture every detail, and easily pass through the narrow bending gap




Mega pixel Two way articulating endoscope

High brightness, large depth of field effect and restore the real picture.




Highlight LED Lighting

High-brightness LED lighting technology, 3 gears and adjustable to adapt to different dark conditions

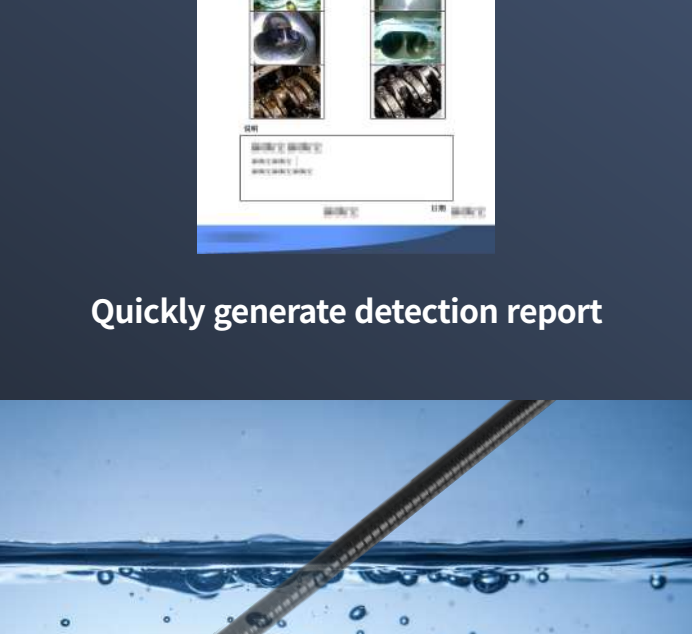

Ergonomic design

One-hand control lens steering, one-hand boot, photo taking, video recording, light adjustment, etc., real one-hand operation.

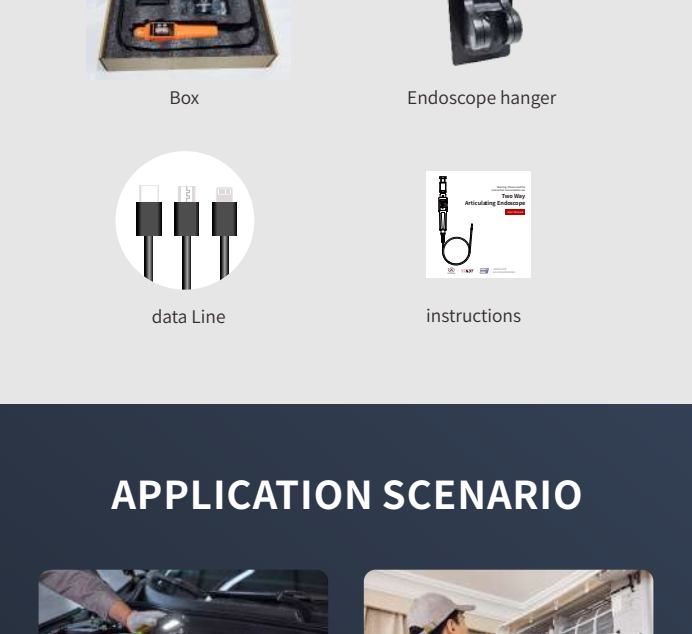

Compatible with Android / iOS / Decoder

Compatible with Android/ iOS/ decoder, the product is equipped with Type-C/Micro-USB/Lighting Apple phone data cable, easy to connect to the phone, install the phone APP, can be used immediately



Install APP

Scan the QR code to download and install APP

Double operation Touch/Key

Touch/key double operation mode, you can use the APP's own key operation, you can also use the device key operation, more intelligent and convenient.

High temperature quick protection

Quickly generate detection report

Probe IP67 protection grade

Product list

- Device host
- Box
- Endoscope hanger
- data Line
- instructions

APPLICATION SCENARIO

Product technical parameters

Host	
Display	Connect external mobile phone
Dimension	220x78x50mm
Interface	USB/Type-C
Power	Use 18650 battery,Working life>3 hours
Operating temperature	-10°C~80°C, Low temperature without preheating
Storage Temperature	-10°C~60°C
Relative Humidity	Max 90%, No condensation
Storage	Mobile internal storage

Camera probe	
Probe Diameter	6mm
Material	Metal hose tube
Pixel	≥2.0MP
Length	1m
Articulation	Two way
Max swing head angle	≥210°
DOF	15mm~100mm
FOV	90°
Viewing angle	Front view
Illumination	LED illumination
Operating Temperature	-10°C~80°C
IP Grade	IP67

System / software	
Image / video format	Image:JPEG(JPG), Video:MP4
Compatible system	Android, iOS, HarmonyOS, Decoder
System language	Chinese, English, German, Japanese, Spanish, Italian, French
Operation mode	Mobile phone touch operation/Button operation